

## HIGH SPEED SIDE SEALING & SHRINKING PACKAGERS



**SM-4525LH** Hi-speed hot air circulating shrink tunnel adopts roller type conveyor, the rollers covered with silicone gel pipe, they roll automatically, also the conveyor can use Teflon mesh belt or S.S. mesh belt instead of rollers. When shrink PE film, need not the rollers roll, easy to convert it by the handle at the end of the tunnel.

The temperature inside the tunnel is even, suitable for shrink PE, POV, POF films.


The inner container forms hot air circulation inside tunnel, the volume of hot air can be controlled by the air doors according to the packing requirements for different products.



SM-4530LH

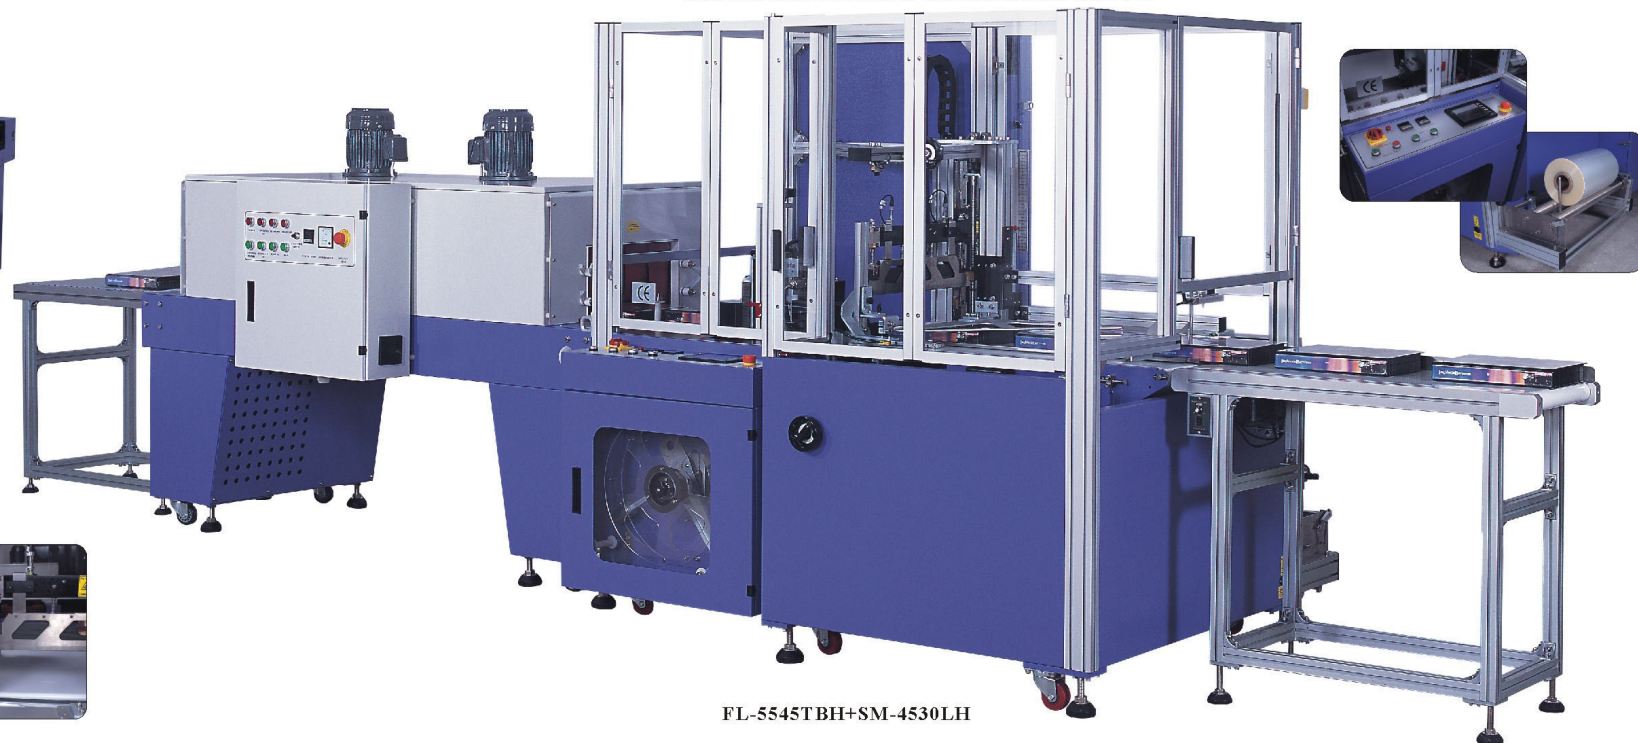

FL-5545TBH+SM-4530LH

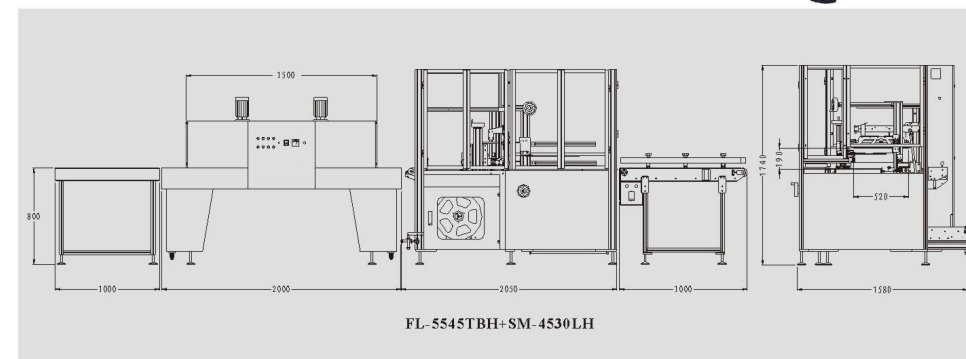

FL-5545TBH+SM-4530LH

Model	FL-5545TBH	FL-5560TBH	SM-4530LH
Machine dimension L×W×H (mm)	2050×1580×1740	2050×1700×1740	2000×1050×1670
Max packing size L×W×H (mm)	Unlimited×300×150	Unlimited×500×150	1500×400×200
Sealing cutter size/tunnel size L×W×H (mm)	400×150	600×150	1500×450×300
Packing speed (pcs/min)	20~45	20~45	≥45
Net weight (kg)	800	900	600
Consumption (kw)	3	3.2	15
Power supply	3 φ 220V/380V 50/60Hz	3 φ 220V/380V 50/60Hz	3 φ 220V/380V 50/60Hz
Air pressure (kg/cm <sup>2</sup> )	5.5	5.5	/
Max current	10A	10.5A	32A

**FL-5545TBH** Hi-speed sealing machine can be combined with an automatic production line for shrink wrapping, adopts a photoelectricity for inducing the products, there are two feed-in modes, auto/man, use fold film on rolls, and the machine will seal other three sides automatically.

According to different collocations for the machine and different products, the max packing speed is up to 45 pcs/min.

Constant temperature heat sealing and cutting system is suitable for PE, PVC, POF etc, industrial standard shrink films, the seal is firm and nice, especially applicable for POF film, adjust the conveyor with the head wheel for packing products of different size. The reliability is higher and easier to operate it.

The front feed in systems speed is adjustable, combines a worktable at the end of the tunnel, makes whole machine highly automatic, it runs automatically without an operator comes true.